



Easy-to-Use, Adjustable Design Prevents Accidental Activation of a Closed Ball Valve or Deactivation of an Open Ball Valve

Durable, lightweight thermoplastic material is chemical resistant and performs effectively in extreme environments


Four locking holes are compatible with all Master Lock safety padlocks

Adjustable design locks out 12.7mm to 50.8mm valves

Loop S806 cable lockout device through the leg openings for the most secure fit

Includes a removable insert to accommodate a wide range of handle designs and dimensions

Product Number	S3080
Description	Adjustable Ball Valve Lockout
Valve Size	12.7mm to 50.8mm
Weight	156g
Product Dimensions	76.9mm W x 104.1mm H x 134.6mm L
Material Used	Polycarbonate and PBT
Color	Red
Temperature Range	-40°C to 93°C
Chemical Resistance	Resistant to common industrial chemicals including methylene chloride, sodium hypochlorate, polydimethylsiloxane, sodium metasilicate, diethyl ether, acetic acid, methanol, n-hexane, naphtha, toluene
Locking Feature	Secure with padlock or with S806 cable lockout for most secure fit
UV Resistance	UL 746C - F2
Compliance	REACH
UPC	071649188008
Packaging	Commercial Bagged
Master Carton Quantity	6

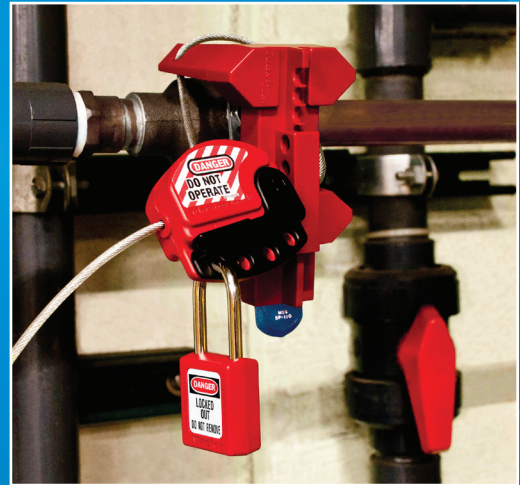

SEE HOW IT WORKS!

Scan this QR code



More Ball Valve Lockouts from Master Lock

S3476 / S3477



- S3476 fits valve handles 6.35mm to 25mm
- S3477 fits valve handles 32mm to 76mm
- Two rows of lockout points allow for a secure fit
- Heat resistant powder coated metal body

S3068



- Fits valves 6.3mm to 101.6mm
- Metal construction withstands temperature extremes and corrosive environments
- Compact for easy storage and carrying
- Works in tight clearance areas

468L



- Fits valves 9.5mm to 101.6mm
- Valve handle removal makes accidental reactivation virtually impossible
- Easy to identify amongst piping